



慈溪市万捷电子有限公司




CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE



UL/CUL 技术参数		UL/CUL Technical Data			
等级	Use Group	B	C	D	
额定电压	Rated Voltage	[V]	300	-	300
额定电流	Rated Current	[A]	15	-	10
接线范围	Wire Range		28-12		
单/多芯线	Solid/Stranded	[AWG]			
耐电压	Withstanding Voltage		1600V/1Min		
IEC 技术参数		IEC61984			
IEC Technical Data					
过电压类别	Overvoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage	[V]	250	320	630
额定电流	Rated Current	[A]	12	12	12
额定冲击电压			4.0	4.0	4.0
Impulse withstand voltage	[kV]				
导线截面积	Conductor cross section		0.2-2.5		
硬质/柔性导线	Solid/flexible	[mm ²]			
材料	Material				
绝缘材料	Insulation Material		PA66		
阻燃等级	Inflammability		UL94V-0		
导体材料	Contact Material		铜合金 Copper alloy		
导体表面镀层	Contactive Coating		镀锡 Sn Plated		
一般参数 Other Data					
间距	Pitch / 极数	Poles	[mm] / [P]	5.08 / 02-24	
剥线长度	Shipping Length		[mm]	7-8	
螺丝	Screw/扭矩	Torque(Max)	[N.m]	M3.0/5	
工作温度	Operating temperature		[°C]	-40~105	
焊接温度	Soldering temperature			-	
引针/尺寸	Pin Dimensions		[mm]	-	
PCB板孔径	PCB Hole Diameter		[mm]	-	

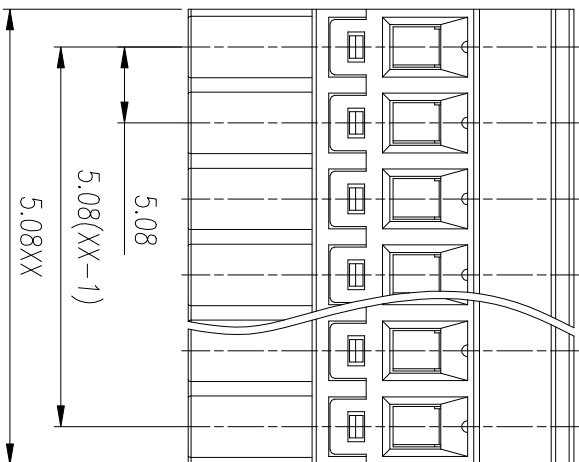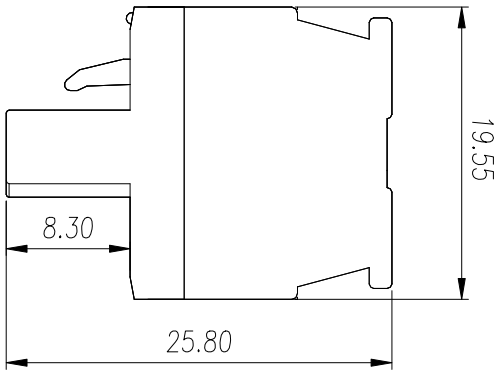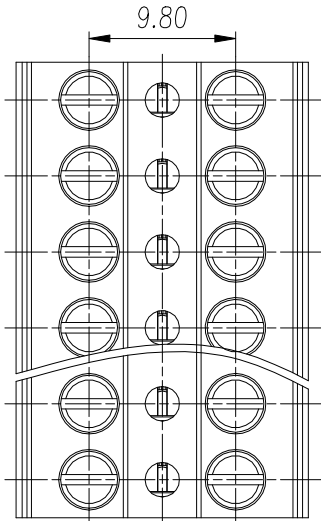

linear dimension	Tolerances Standard GB/T 14486-2008											
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		
variable range	6 to 6	10 to 10	30 to 30	60 to 60	100 to 100	160 to 160	160 to 160	10 to 10	10 to 10	100 to 100		

单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 2:1

第三视图/THIRD ANGLE PROJECTION 版本 / REV V0



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称 / TITLE WJZEDGKAH-5.08-XXP-1YY-00A